

Proof Coil Chain

Manufactured from a low grade carbon steel, this versatile range of chain is proof tested to at least twice the maximum load recommended for normal use.

Chain sizes 6mm to 24mm.


Proof Coil Chain is not suitable for industrial lifting purposes.

Test certificates available on request.

The MWL stated is for guidance in the selection of a chain with sufficient strength for intended applications.

Dimensions and masses subject to commercial tolerances and design changes without notice.

Applications: Manufacturing, marine and agricultural industries.

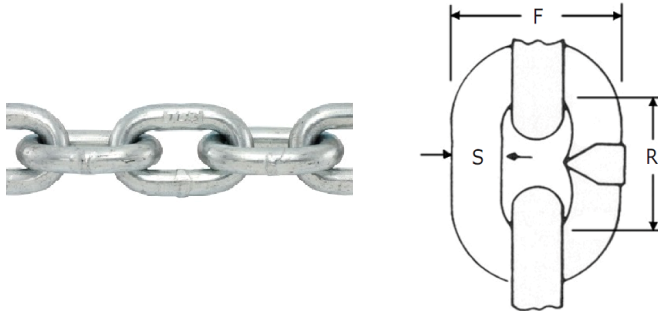

Product Specifications

Name	ITEM #	Size (mm)	MWL (tonnes)	S (mm)	R (mm)	F (mm)	Weight per m (kg)
Proof Coil Chain Regular Link 3mm Galvanised	10664	3	0.06	3	16.6	13.1	0.17
Proof Coil Chain Regular Link 4mm Galvanised	14661	4	0.11	3.8	19.6	15.8	0.27
Proof Coil Chain Regular Link 5mm Galvanised	10540	5	0.19	4.75	23.2	19.1	0.42
Proof Coil Chain Regular Link 6mm Galvanised	19068	6	0.32	6	28	24	0.73
Proof Coil Chain Regular Link 8mm Galvanised	11400	8	0.53	7.6	35.8	29.2	1.14
Proof Coil Chain Regular Link 10mm Galvanised	11618	10	0.86	9.5	43.4	35.5	1.73
Proof Coil Chain Regular Link 13mm Galvanised	15061	13	1.5	12	51.7	44.5	2.89
Proof Coil Chain Regular Link 16mm Galvanised	17186	16	2.31	16	59.6	57.3	5.37
Proof Coil Chain Regular Link 20mm Galvanised	12366	20	3.67	20	73.3	71	8.33
Proof Coil Chain Regular Link 24mm Galvanised	16744	24	5.34	24	87	84.8	11.9